


- **Pevné trubky hrdlované (320 N) / Rigid Pipes with belling at one end (320 N)**  
**Pevné trubky hrdlované (750 N) / Rigid Pipes with belling at one end (750 N)**

Klasifikační kód: 2241 (320N), 3341 (750N)

Technická charakteristika:

- Materiál: samozhášivé PVC (calcium-zinek stabilizátor).
- Norma: ČSN EN 61386ed.2:09
- Barva: pro 320 N - světle šedá (RAL 7035), pro 750 N - tmavě šedá (RAL 7012)
- Mechanická odolnost: 320 N - nízká  
750 N - střední
- Použití od: -25 °C do +60°C
- Možnost montáže na podklad: A-C3

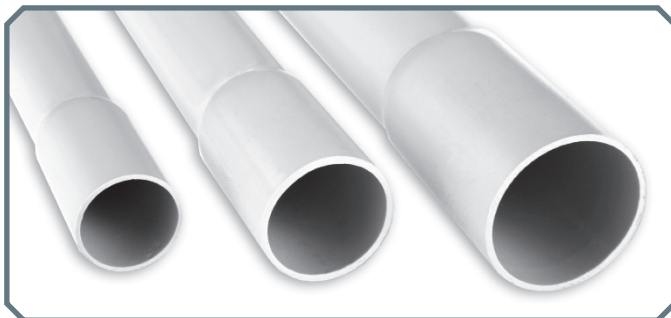


**Poznámka:**

**Trubky v délce 2m baleny do kartonu!**

Classification code: 2241 (320N), 3341 (750N)

Technical characteristic:

- Material: Self-extinguishable PVC (Calcium-Zinc stabilization).
- Norm: ČSN EN 61386ed.2:09
- Colour: 320 N - Light Grey (RAL 7035)  
750 N - Dark Grey (RAL 7012)
- Resistance to pressure: 320 N - low  
750 N - medium
- Usable temperature range: min -25°C and max +60 °C
- Can be installed in all degrees of flammability from A to C3

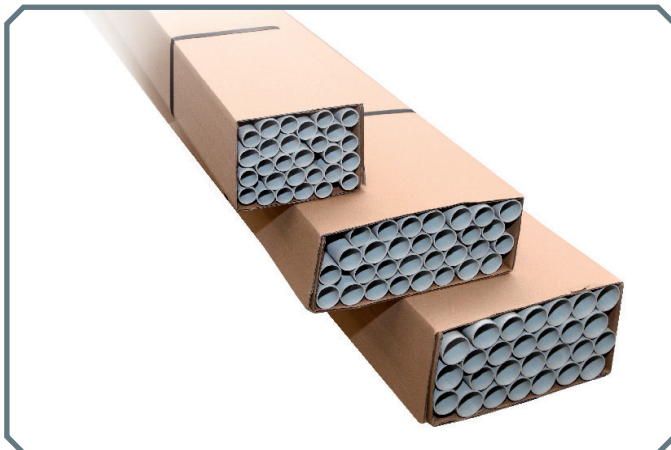

**Note:**

**Pipes of length 2m are packed in carton!**

mech. odolnost mechanical strength		nízká / low 320 N	bal. fólie/ks foil pack./pcs.	bal. karton/ks carton pack./pcs.
vnější / vnitřní průměr outer / inner diameter	délka length	obj. kód / ord.code		
16 mm / 13,7 mm	2 m	PT32016/2/S	30	29
16 mm / 13,7 mm	3 m	PT32016/3/S	30	
20 mm / 17,4 mm	2 m	PT32020/2/S	30	30
20 mm / 17,4 mm	3 m	PT32020/3/S	30	
25 mm / 22,1 mm	2 m	PT32025/2/S	30	27
25 mm / 22,1 mm	3 m	PT32025/3/S	30	
32 mm / 28,6 mm	2 m	PT32032/2/S	10	15
32 mm / 28,6 mm	3 m	PT32032/3/S	10	
40 mm / 35,8 mm	2 m	PT32040/2/S	10	20
40 mm / 35,8 mm	3 m	PT32040/3/S	10	
50 mm / 45,1 mm	2 m	PT32050/2/S	10	8
50 mm / 45,1 mm	3 m	PT32050/3/S	10	
63 mm / 57 mm	2 m	PT32063/2/S	10	6
63 mm / 57 mm	3 m	PT32063/3/S	10	

mech. odolnost <i>mechanical strength</i>		střední / <i>medium 750 N</i>		
vnější / vnitřní průměr <i>outer / inner diameter</i>	délka <i>length</i>	obj. kód / <i>ord.code</i>	bal. fólie/ks <i>foil pack./pcs.</i>	bal. karton/ks <i>carton pack./pcs.</i>
16 mm / 13 mm	2 m	PT75016/2/S	30	29
16 mm / 13 mm	3 m	PT75016/3/S	30	
20 mm / 16,9 mm	2 m	PT75020/2/S	30	30
20 mm / 16,9 mm	3 m	PT75020/3/S	30	
25 mm / 21,4 mm	2 m	PT75025/2/S	30	27
25 mm / 21,4 mm	3 m	PT75025/3/S	30	
32 mm / 27,8 mm	2 m	PT75032/2/S	10	15
32 mm / 27,8 mm	3 m	PT75032/3/S	10	
40 mm / 35,4 mm	2 m	PT75040/2/S	10	20
40 mm / 35,4 mm	3 m	PT75040/3/S	10	
50 mm / 44,3 mm	2 m	PT75050/2/S	10	8
50 mm / 44,3 mm	3 m	P775050/3/S	10	
63 mm / 56,7 mm	2 m	PT75063/2/S	10	6
63 mm / 56,7 mm	3 m	PT75063/3/S	10	

• **Vývodky**  
*Glands*



	typ <i>type</i>	obj.kód <i>ord.code</i>	IP kód (těsnění) <i>IP code (sealing)</i>	balení / ks <i>packing / pcs.</i>
PG - závit / <i>PG system winding</i>	PG - 7	PRPG-7	IP 67	100 / 50
	PG - 9	PRPG-9	IP 67	100 / 50
	PG - 11	PRPG-11	IP 67	100 / 50
	PG - 13,5	PRPG-13,5	IP 67	100 / 50
	PG - 16	PRPG-16	IP 67	100 / 50
	PG - 21	PRPG-21	IP 67	100 / 50
	PG - 29	PRPG-29	IP 67	10 / 1
	PG - 36	PRPG-36	IP 67	10 / 1
	PG - 42	PRPG-42	IP 67	10 / 1
	PG - 48	PRPG-48	IP 67	10 / 1
metrický závit <i>Metric system winding</i>	M16 x 1,5	PRM-16	IP 67	50
	M20 x 1,5	PRM-20	IP 67	25
	M25 x 1,5	PRM-25	IP 67	25
	M32 x 1,5	PRM-32	IP 67	10
	M40 x 1,5	PRM-40	IP 67	10
	M50 x 1,5	PRM-50	IP 67	10
	M63 x 1,5	PRM-63	IP 67	10